


#34120 HeiQ Smart Temp:



HeiQ required test to use this hangtag	QV: <i>initial and 10x washes</i> QC: <i>after 3x washes</i> HeiQ Dynamic Evaporation <ul style="list-style-type: none">• <i>For lightweight fabrics (up to 150gsm):</i> Dynamic evap. rate P ≥ 30% points (compared to the untreated fabric)• <i>For heavy fabrics (more than 150gsm):</i> Dynamic evap. rate P ≥ 15% points (compared to the untreated fabric)
*For use in following countries	Worldwide
Languages	Multilingual (EN/FR/DE/ES/IT)
Used for following HeiQ products	HeiQ Adaptive AC-06 HeiQ Adaptive AC-03

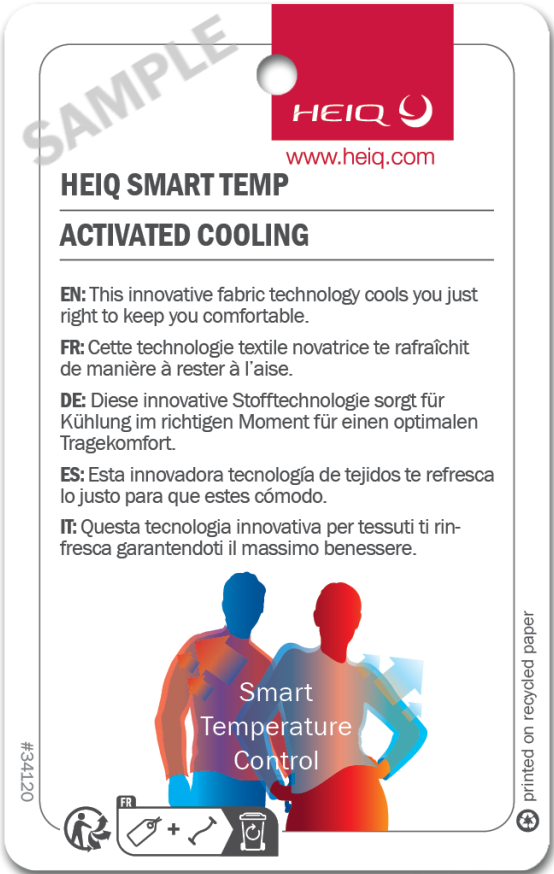

It is the manufacturer’s / brand’s responsibility to fulfill the local labeling requirements and ensure that the correct hangtag is being attached to their product!

QV = Quality Validation / QC = Quality Control, Washes acc. to. ISO 6330 (suggested 4G)